



Number of rings:	18 rings
Rated voltage:	0-240VAC/VDC
Rated current:	10A/ring:3rings-2A/ring:15rings
Dielectric strength:	500VAC@50Hz,60s
Insulation resistance:	>500MΩ/500VDC
Dynamic contact resistance:	<0.01Ω
Contact material:	Precious metals
Housing material:	Aluminium
Operating temperature:	-20°C÷ +80°C
Operating speed:	0≈ 250 rpm

AWG 16 - 10A/circuit



AWG 28 - 2A/circuit

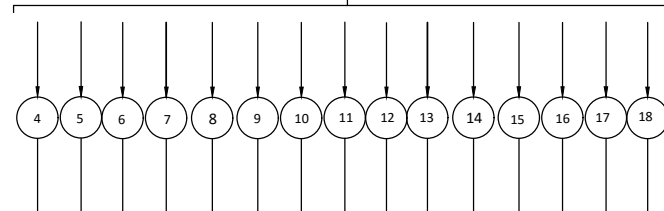


"WE RESERVE ALL RIGHTS IN CONNECTION WITH THIS DOCUMENT AND IN THE SUBJECT MATTER REPRESENTED THEREIN. THE RECIPIENT HEREBY ACKNOWLEDGES THESE RIGHTS AND SHALL NOT, WITHOUT OUR PRIOR PERMISSION IN WRITING, DISCLOSE OR DIVULGE THIS DOCUMENT IN WHOLE OR IN PART TO THE THIRD PARTIES OR USE IT FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS DELIVERED TO RECIPIENT."

ANGULAR TOLERANCE: $\pm 0,5^\circ$
TOLERANCE:
0,5 - 6 $\pm 0,1$
>6 - 30 $\pm 0,2$
>30 - 120 $\pm 0,3$
>120 - 400 $\pm 0,5$
>400 - 1000 $\pm 0,8$
>1000 - 2000 $\pm 1,2$
>2000 - 4000 $\pm 2,0$

CUSTOMER:

APPLICATION:

PROJECTION:



Slip Ring Outline Drawing

ZER-X6 3P1-15S

ARTICLE NO:

Designer:  
BHI

Date:  
05/02/14

Drawing No:  
S-10001

Rev:  
1